

## Palfinger P640

↑  
**64 m**  
↓  
Maximum  
working  
height



**This MEWP has a hanging work cage which can rotate 2 x 200° to allow the full width of the cage to be used at the rear of buildings. With up to 15 m of negative reach this MEWP is ideal for bridge inspections. It has 600 kg safe lifting capacity.**

### Material Handling Capabilities

- ✓ Cage capacity of 600 kg
- ✓ Cage winch available
- ✓ Lifting brackets available
- ✓ Extendable work cage


### Key Benefits & Features

- ✓ Hanging basket & 2 x 200° cage rotation
- ✓ Negative reach of up to 15 m
- ✓ On-board generator supplies 110V, 230V & 400V power to work cage


### Available for Hire with

- ✓ 600 kg or 2 x 150 kg winches
- ✓ Lifting brackets
- ✓ Camera attachment or lighting rig
- ✓ Air & water in the work cage


## Palfinger P640

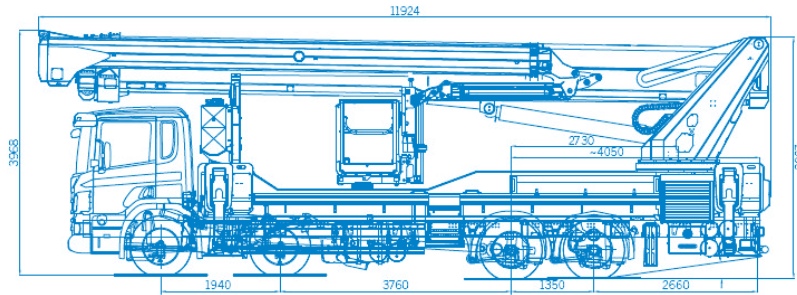

**64 m**  
Working Height



**38.2 m**  
Lateral Outreach



**L2.4 x  
W1.04 (m)**  
Standard Cage  
Dimensions



**L3.81 x  
W1.04 (m)**  
Maximum Cage  
Dimensions



**600 kg**  
Cage Capacity



**2 x 200°**  
Cage Rotation



**3.93 m**  
Transport Height



**11.95 m**  
Transport Length




**30.3 t**  
Gross  
Weight





**260 kN**  
Maximum  
Outrigger Loading



**0°**  
Permissible  
Inclination



**16 m**  
Maximum  
Jib Length

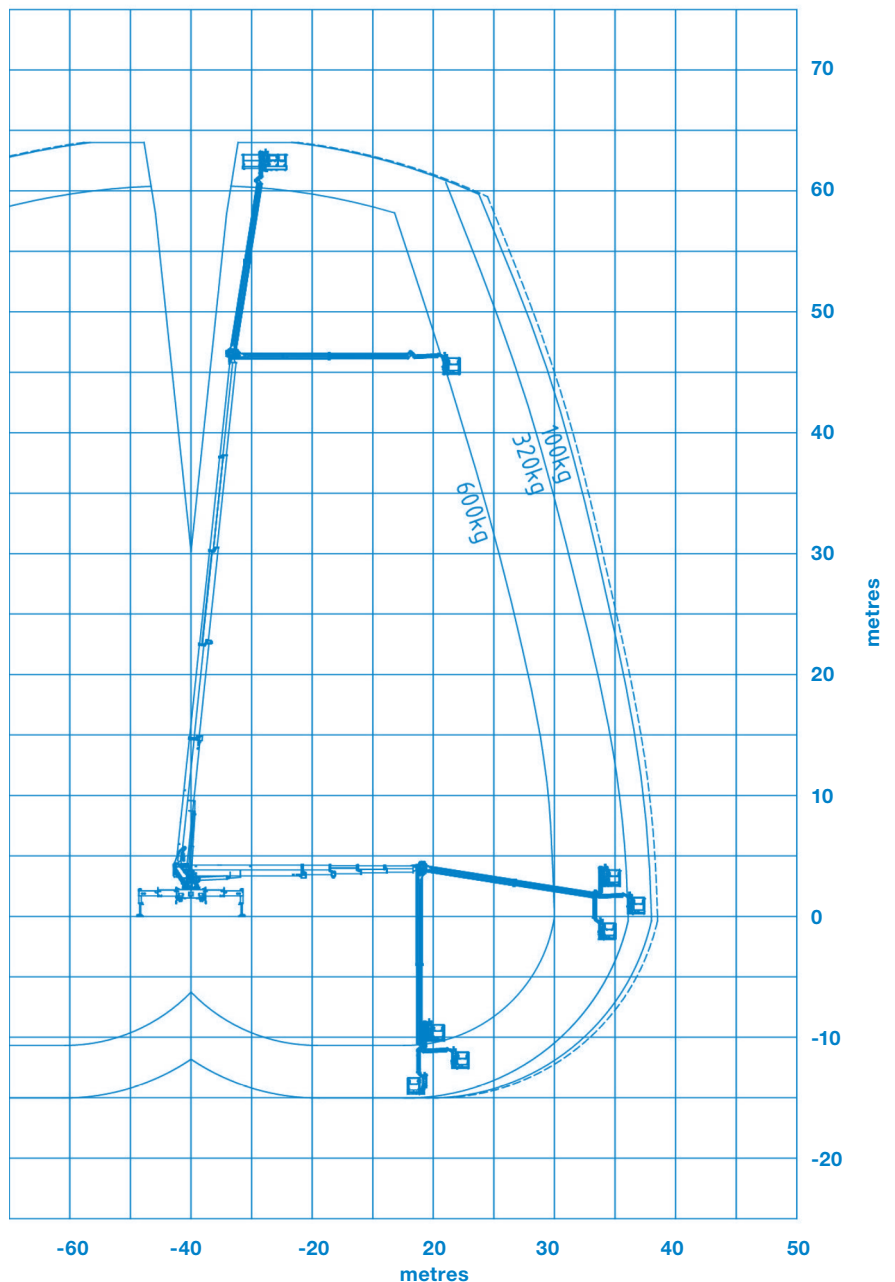

All measurements and weights are approximate and refer to the standard basic execution. Technical alterations reserved.

**We can also provide the following services:**

**Traffic Management ▶ Trackway ▶ Rope Access ▶ Lifting solutions**